

# SITRANS F flowmeters

## SITRANS F M

### Transmitter MAG 5000/6000

#### Overview



Transmitter MAG 5000/6000 compact version (left) and 19" insert version (right)

The MAG 5000 and 6000 are microprocessor-based transmitters engineered for high performance, easy installation, commissioning and maintenance. The transmitters evaluate the signals from the SITRANS F M sensors type MAG 1100, MAG 1100 F, MAG 3100 and MAG 5100 W.

Transmitter types:

- MAG 5000: Max. measuring error 0.5% of rate (incl. sensor)
- MAG 6000: Max. measuring error 0.25% of rate (incl. sensor, see also sensor specifications) and with additional features such as: "plug & play" insert bus modules; integrated batch functions.

#### Benefits

- Superior signal resolution for optimum turn down ratio
- Digital signal processing with many possibilities
- Automatic reading of SENSORPROM data for easy commissioning
- User configurable operation menu with password protection.
- 3 lines, 20 characters display in 11 languages.
- Flow rate in various units
- Totalizer for forward, reverse and net flow as well as additional information available
- Multiple functional outputs for process control, minimum configuration with analogue, pulse/frequency and relay output (status, flow direction, limits)
- Comprehensive self-diagnostic for error indication and error logging (see under SITRANS F M diagnostics)
- Batch control
- Custody transfer approval: PTB, OIML R 75, OIML R 117, OIML R 49 and MI-001,
- MAG 6000 with add-on bus modules for HART, FOUNDATION Fieldbus H1, DeviceNet, MODBUS RTU/RS485, PROFIBUS PA and DP

#### Application

The SITRANS F M flowmeters are suitable for measuring the flow of almost all electrically conductive liquids, pastes and slurries. The main applications can be found in:

- Water and waste water
- Chemical and pharmaceutical industries
- Food & beverage industries
- Power generation and utility

#### Design

The transmitter is designed as either IP67 NEMA 4X enclosure for compact or wall mounting or 19" version as a 19" insert as a base to be used in:

- 19" rack systems
- Panel mounting IP65/NEMA 4
- Back of panel mounting IP20/NEMA 2
- Wall mounting IP66/NEMA 4

Several options on 19" versions are available such as:

- Transmitters mounted in safe area for Ex ATEX approved flow sensors (incl. barriers)
- Transmitters with electrode cleaning unit

#### Function


The MAG 5000/6000 are microprocessor-based transmitters with a built-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electro-magnetic sensors and also fulfil the task of a power supply unit which provides the magnet coils with a constant current.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.


#### Displays and controls

Operation of the transmitter can be carried out using:

- Control and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS or MODBUS communication

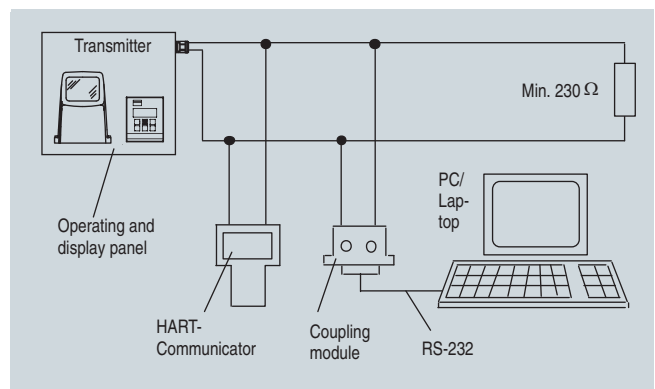

HART communication

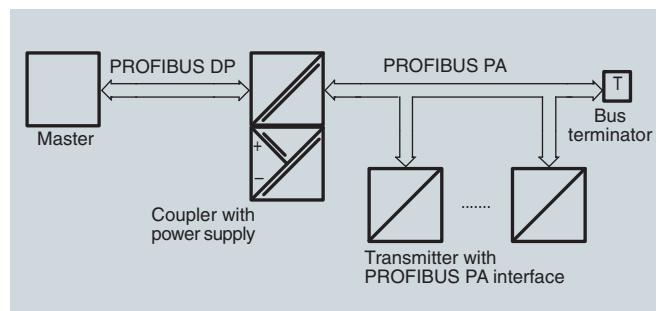

PROFIBUS PA communication

# SITRANS F flowmeters

## SITRANS F M

### Transmitter MAG 5000/6000

#### Technical specifications

##### Mode of operation and design

Measuring principle	Electromagnetic with pulsed constant field
Empty pipe	Detection of empty pipe (special cable required in remote mounted installation)
Excitation frequency	Depend on sensor size
Electrode input impedance	$> 1 \times 10^{14} \Omega$

##### Input

<b>Digital input</b>	11 ... 30 V DC, $R_i = 4.4 \text{ K}\Omega$
• Activation time	50 ms
• Current	$I_{DC \text{ 11 V}} = 2.5 \text{ mA}$ , $I_{DC \text{ 30 V}} = 7 \text{ mA}$

##### Output

##### Current output

• Signal range	0 ... 20 mA or 4 ... 20 mA
• Load	$< 800 \Omega$
• Time constant	0.1 ... 30 s, adjustable

##### Digital output

Frequency	0 ... 10 kHz, 50% duty cycle (uni/bidirectional)
Pulse (active)	DC 24 V, 30 mA, $1 \text{ K}\Omega \leq R_i \leq 10 \text{ K}\Omega$ , short-circuit-protected (power supplied from flowmeter)
Pulse (passive)	DC 3 ... 30 V, max. 110 mA, $200 \Omega \leq R_i \leq 10 \text{ K}\Omega$ (powered from connected equipment)
Time constant	0.1 ... 30 s, adjustable
<b>Relay output</b>	
Time constant	Changeover relay, same as current output
Load	42 V AC/2 A, 24 V DC/1 A
Low flow cut off	0 ... 9.9% of maximum flow
Galvanic isolation	All inputs and outputs are galvanically isolated

##### Max. measuring error (incl. sensor and zero point)

MAG 5000	0.5% of rate
MAG 6000	0.25% of rate

##### Rated operation conditions

Ambient temperature	
• Operation	<ul style="list-style-type: none"> <li>• Display version: -20 ... +50 °C (-4 ... +122 °F)</li> <li>• Blind version: -20 ... +60 °C (-4 ... +140 °F)</li> </ul>
• Storage	-40 ... +70 °C (-40 ... +158 °F)

##### Mechanical load

Compact version	18 ... 1000 Hz, 3,17 g rms, sinusoidal in all directions to IEC 68-2-36
19" insert	1 ... 800 Hz, 1 g, sinusoidal in all directions to IEC 68-2-36

##### Degree of protection

Compact version	IP67/NEMA 4X to IEC 529 and DIN 40050 (1 mH <sub>2</sub> O 30 min.)
19" insert	IP20/NEMA 2 to IEC 529 and DIN 40050

##### EMC performance

EN 61326-1 (all environments)  
EN 61326-2-5

##### Display and keypad

Totalizer	Two eight-digit counters for forward, net or reverse flow
-----------	---

##### Display

Background illumination with alphanumeric text, 3 x 20 characters to indicate flow rate, totalized values, settings and faults; Reverse flow indicated by negative sign

##### Time constant

Time constant as current output time constant

##### Design

Enclosure material	
• Compact version	Fiber glass reinforced polyamide; optional (IP67 only): AISI 316 stainless steel
• 19" insert	Standard 19" insert of aluminium/steel (DIN 41494), width: 21 TE, height: 3 HE
• Back of panel	IP20/NEMA 2; Aluminium
• Panel mounting	IP65/NEMA 4; ABS plastic
• Wall mounting	IP66/NEMA 4; ABS plastic

##### Dimensional drawings

Compact version	See dimensional drawings
19" insert	See dimensional drawings

##### Weight

Compact version	0.75 kg (2 lb)
19" insert	See dimensional drawings

##### Power supply

- 115 ... 230 V AC +10% -15%, 50 ... 60 Hz
- 11 ... 30 V DC or 11 ... 24 V AC

##### Power consumption

- 230 V AC: 17 VA
- 24 V AC: 9 VA,  $I_N = 380 \text{ mA}$ ,  $I_{ST} = 8 \text{ A}$  (30 ms)
- 12 V DC: 11 W,  $I_N = 920 \text{ mA}$ ,  $I_{ST} = 4 \text{ A}$  (250 ms)

##### Certificates and approvals

Custody transfer approval (MAG 5000/6000 CT)	<p>CE, C-UL general purpose, C-tick; CSA/FM Class 1, div 2</p> <ul style="list-style-type: none"> <li>• PTB OIML R 49 (cold water pattern approval); MI-001</li> <li>• PTB and DANAK OIML R 75 (hot water pattern approval) (MAG 6000 CT)</li> <li>• PTB and DANAK OIML R 117 Other media than water (milk, beer etc.) pattern approval (MAG 6000 CT)</li> </ul>
--	--

##### Communication

Standard	
• MAG 5000	Without serial communication or HART as option
• MAG 6000	Prepared for client mounted add-on modules
Optional (MAG 6000 only)	HART, MODBUS RTU/RS485, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA, PROFIBUS DP as add-on modules
• MAG 5000/6000 CT	No communication modules approved